



VMI Hybrid Morning Guide

Below is a standard procedure for starting up your VMI Hybrid at the start of the day. It will help ensure that the Hybrid operates efficiently throughout the day.

- 1) Turn on power to the unit by flicking the ON/OFF button to the ON position, located at the rear of the unit. The **Top Cover** will automatically open after a few seconds.
- 2) Take out the bottle of compound from the back of the unit and **shake it well**.
- 3) **Take the platen out** by simply lifting it, then take the **Screw Lid** (without the grommet) from an opened bottle of compound and place it over the **Centre Spindle**.
- 4) While holding down the lid of the Hybrid, push the **prime chemical button (C)** and then the **prime water button (W)** and wait till both are flowing freely through the lines.
- 5) Once both the chemical and water lines are primed, replace the **Platen**.
- 6) Place the DVD/CD/Blu-Ray onto the Platen, with the **label side of disc facing down!**
- 7) Select the disc repair type by pressing either **Regular** or **Blu-ray**; select longer cycle times by pressing this button multiple times. Then close the **Top Cover** to start the cycle.
- 8) Once the cycle has completed, the **Top Cover** will automatically open.



Please note: Keep the top cover open with the nozzle caps installed when machine is not in use.




VMI Hybrid Pack Up Guide

Below is a standard procedure for packing up your Hybrid at the end of the day. It will help ensure that the Hybrid operates as expected every morning.

1. Ensure there is **no disc** left inside the Hybrid.



2. Install the **Nozzle Cap**.

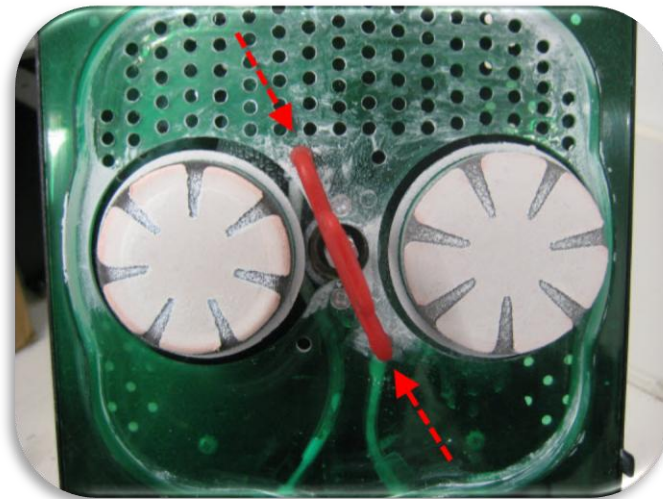

3. Leave the Top Cover **up** and power **off** the unit at the back.
4. Empty the **Spill Tray** if necessary.
5. **Clean** the VMI Hybrid by wiping away any excess chemical if necessary.